
## SPECIFICATIONS:

- 1. LADDER TO BE PROFESSIONALLY WELDED AND FABRICATED WITHOUT VOIDS OR SHARP EDGES.
- 2. LADDER TO BE HOT DIPPED GALVANIZED "AFTER" ALL WELDING HAS BEEN COMPLETED.
- 3. INSTALLATION TO WALL REQUIRES APPROPRIATE HEAVY DUTY BOLTS (MIN. 1/2" DIA.) GRADE 5, WITH SLEEVES OR APPROVED ALTERNATE METHOD. SET BRACKETS AND BOLTS IN BED OF GRAY URETHANE CAULK. AFTER INSTALLATION IS COMPLETE, CAULK BRACKET EDGES AND BOLT HEADS WITH GRAY URETHANE CAULK.
- 4. CONTRACTOR IS RESPONSIBLE FOR VERIFING INSTALLATION DIMENSIONS WITH REGARD TO BRACKET LOCATIONS & LENGTHS AND LADDER LOCATION AND LENGTH TO PROVIDE FOR A PROFESSIONAL, SAFE AND SECURE INSTALLATION. TOP RUNG MUST BE EVEN WITH TOP SURFACE LADDER IS MOUNTED TO.

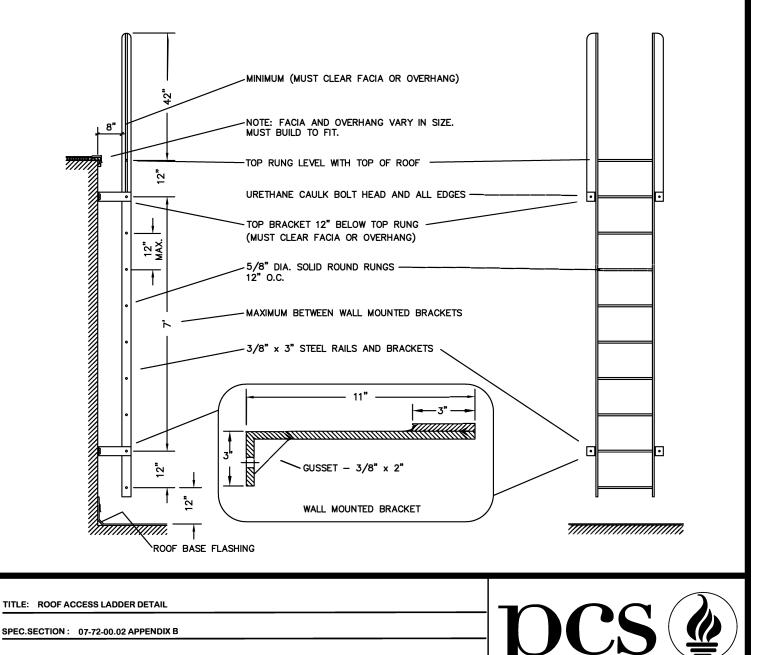

**PINELLAS COUNTY SCHOOLS** 

DATE: 07/11/2019